


e-Net e-P132-X TCP / IP CONVERTER

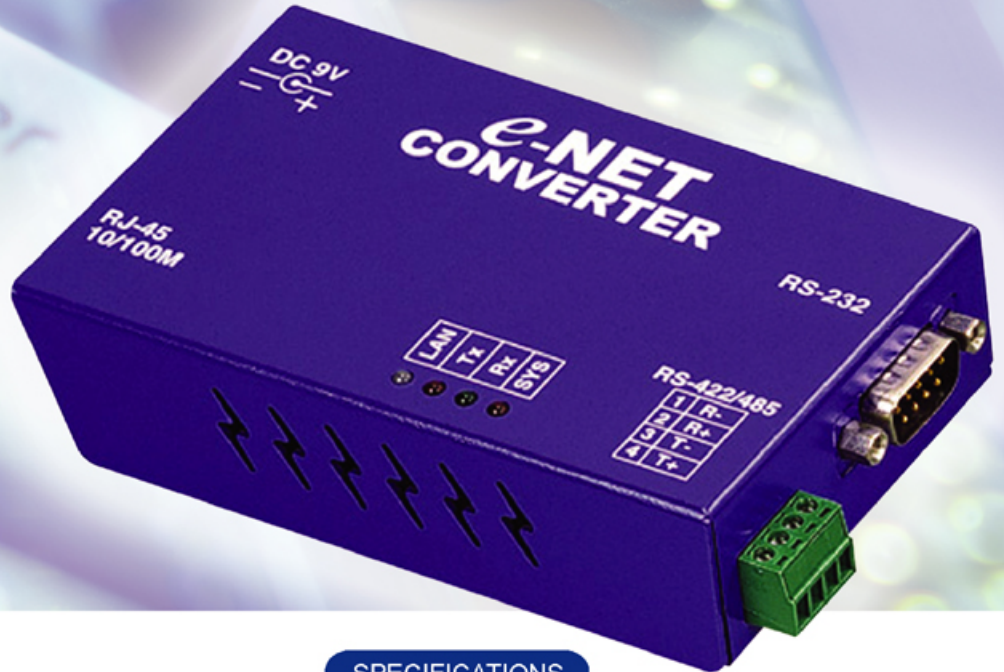

FEATURES

- Access Control & Time Attendance system can be connected to network.
- CE / FCC approved.
- Support WINDOWS and provide WINSOCK SDK.
- High speed 10/100M bps TCP/IP converter.
- Built-in RS-232 / RS-422 / RS-485 Terminal Register.
- High speed data transfer function.
- Provide IP to setup UTILITY.
- Provide software.
- Watch Dog function.

SPECIFICATIONS

HARDWARE

CPU	32-bit ARM7, 33 MHz
RAM	2 MB (1M * 16bits)
ROM	128KB
Communication interface	LAN: RJ-45 Connector COM: RS-232 / RS-485

ELECTRICAL

Operating voltage	DC 9V, 500mA
Power consumption	4.5W (max)
Baud rate	300bps~115.2Kbps-N-8-1

ENVIRONMENTAL

Operating temperature	0°C~50°C / 32°F~122°F
Relative humidity	5%~95% (Non condensing)

PHYSICAL

Dimensions	115mm(W) x 70mm(D) x 30mm(H)
Weight	150g

HUNDURE

www.hundure.com

The manufacture reserves the right to revise this publication without obligation to notify any person or organization of such revisions.

e-P132-X-CE-20030925